


Safety information for returning **RMD Kwikform** equipment



The safety of people is of paramount importance to RMD Kwikform Ltd and after extensive discussions with the HSE we have produced packaging procedures for the transportation of our equipment. This document communicates those procedures to assist all users of our products to load vehicles in a safe manner



Items such as steelstage and scaffold boards, stacked neatly and adequately secured to ensure their stability.

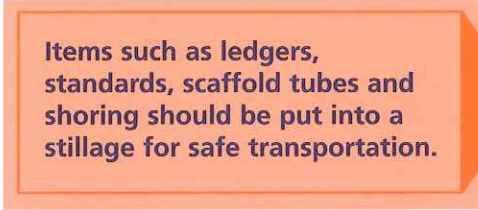

Items such as ledgers, standards, scaffold tubes and shoring should be put into a stillage for safe transportation.



Loose items should be placed in storage bins, but not loaded above the top of the bin.



Aluminum beams should be stacked in maximum numbers of 30 and secured.



Soldiers should be stacked in maximum numbers of 12 and secured.

Please contact your nearest branch if you require any further assistance
A SECURE LOAD IS A SAFE AND COST-EFFECTIVE LOAD
Equipment transported in an un-safe manner could cause injury