


Hydraulic Wedgie and Spread Cylinders

▼ Shown clockwise from top: WR-13, WR-5, A-92, WR-15



- **WR-5:** For use in very confined work areas
- **WR-13:** Integrated pump offers portable power
- **WR-15:** For long stroke spreading applications
- **Single-acting, spring return**
- **A-92:** Spreader attachment; threads on RC-Series 10 ton cylinders (except RC-101).

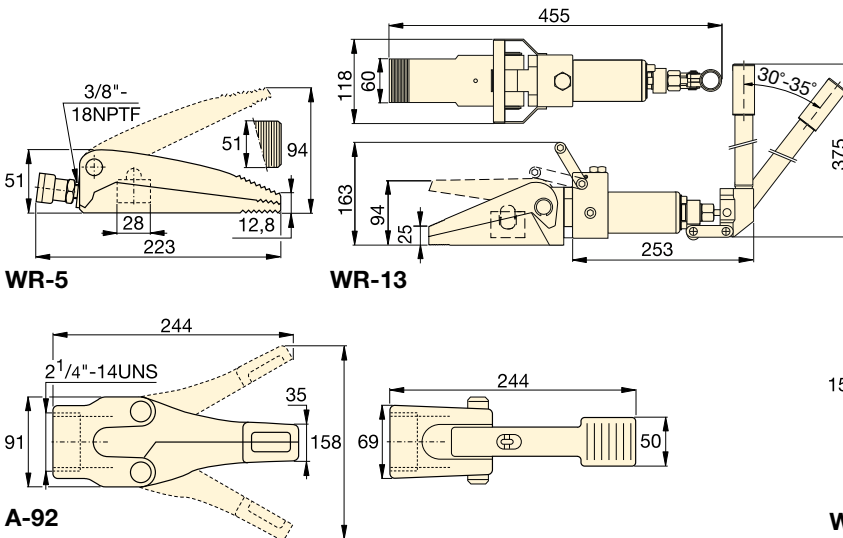

A WR Series



Capacity:

0,75 - 1,50 ton

Tip Clearance:

12,8 - 35 mm

Maximum Spread:

94 - 292 mm

Maximum Operating Pressure:

700 bar



RC-Series Cylinders

10 ton RC-Series cylinders (except RC-101) fit into A-92 Spreader Attachment.


Page: 6



Best Match Hand Pump

To power your WR-5 and WR-15 the **P-392** hand pump is an ideal choice. Use Enerpac H700-Series (page 120) for hydraulic connection.

Page: 66

Cylinder Capacity ton (kN)	Tip Clearance mm	Model Number	Maximum Spread (mm)	Cylinder Effective Area (cm ²)	Oil Capacity (cm ³)	 (kg)
1 (8,9)	12,8	WR-5	94	6,5	10	2,3
1,50 (12)	25,4	WR-13	94	14,4	—	12,0
0,75 (6)	32	WR-15	292	14,5	64	11,3
1 (8,9)	35	A-92	158	—	—	3,6

The portable integrated spreader gives you the power you need, fast. A WR-13 integrated spreader is used to free a frozen rail switch. ▶

