

Bearing Cup and Bearing Pullers

▼ Shown: **BHP-380**



Bearing Cup Puller

- Made of high strength steel alloy
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts
- Adjustable to fit a variety of bearings and seals.

BHP Series



Capacity:

8, 20, 30 and 50 ton

Maximum Reach:

110 - 145 mm

Spread Range:

110 - 359 mm

Maximum Operating Pressure:

700 bar

▼ SELECTION CHART

Capacity *		8 ton	20 ton	30 ton	50 ton
30 Bearing Cup Puller					
Model Number		BHP-180	BHP-280	BHP-380	BHP-580
Spread (mm)	Max.	110	220	359	359
	Min.	26	25	50	50
Reach (mm)	Max.	110	140	145	145
	Center Screw Thread	3/4"- 16 UNF	1"- 8 UNC	1 1/4"- 7 UNC	1 5/8"- 5.5

* Puller capacity, not attachment capacity. See warning on this page.



WARNING


Do not exceed 50% of the rated puller capacity when using a double crosshead (2 grip arms) or when using puller legs in combination with bearing puller attachment.

▼ Shown: **BHP-382**




Bearing Puller

- Made of high strength steel alloy
- Wedge-shaped edges allow removal of the most hard-to-grip components
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts.

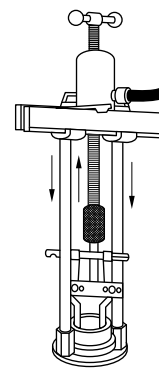

◀ Bearing Cup Puller shown with Crosshead Puller Attachment.



Bearing Puller shown with Crosshead Puller Attachment. ▶

▼ SELECTION CHART

Capacity*		8 ton	20 ton	30 ton	50 ton
40 Bearing Puller					
Model Number		BHP-181	BHP-282	BHP-382	BHP-582
Spread (mm)	Max.	104	130	245	245
	Min.	25	9	17	17
Width (mm)		126	150	264	264
Thread		5/8"-18 UNF	5/8"- 18 UNF	1"- 14 UNS	1 1/4"- 12 UNF

* Puller capacity, not attachment capacity. See warning on this page.



Bearing Puller

Bearing Puller has wedge shaped edges for placing puller behind hard to reach bearings, gears, etc., where clearance prevents direct application of grip puller arms. The Bearing Puller can be used with the Cross Bearing Puller or the Grip Puller.