


FJ-30 FLAT-JACK TECHNICAL DATA-SHEET

TECHNICAL DIMENSIONS

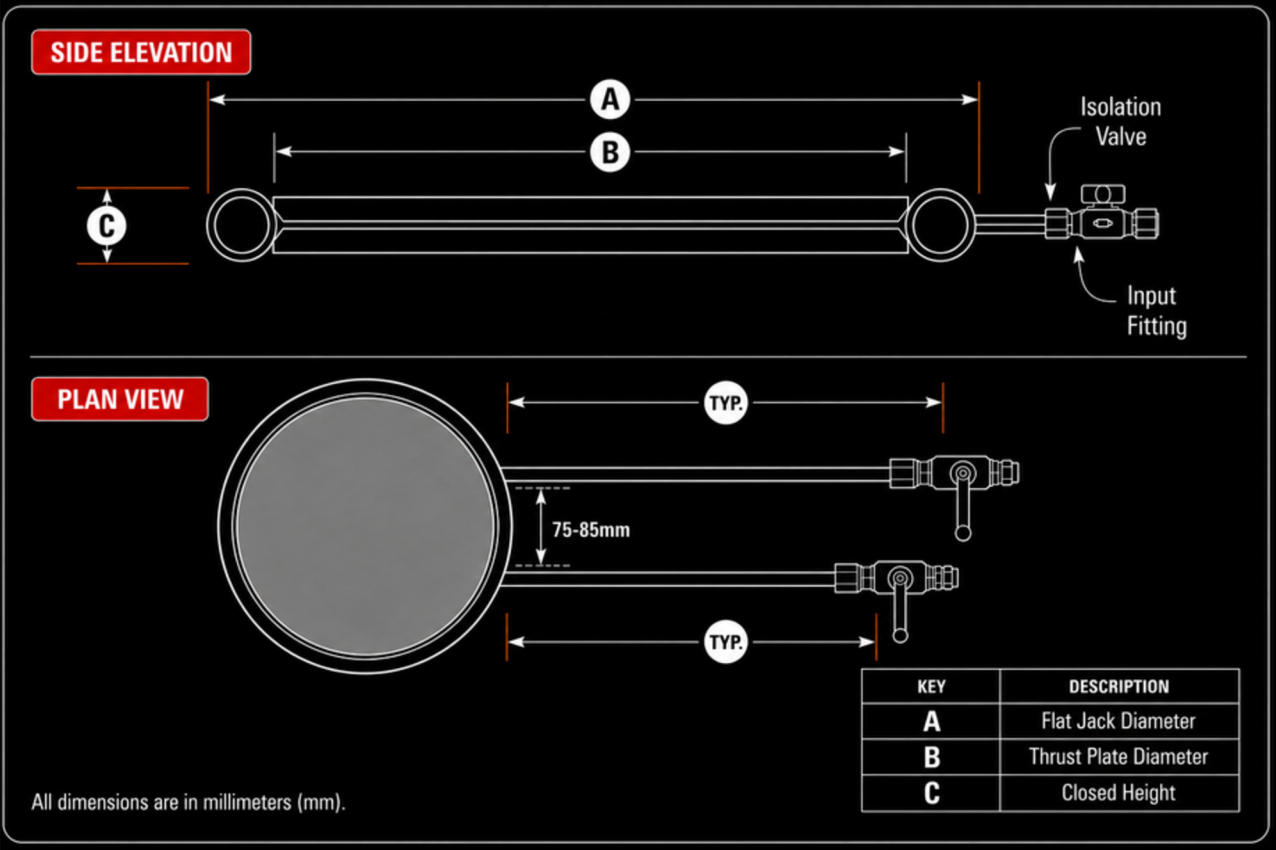

KEY FEATURES

- ✓ Ultra-Low Height Design (28-35mm)
- ✓ High Thrust Forces (8 - 1,380+ Tonnes)
- ✓ Suitable for Temporary or Permanent Use
- ✓ Full Proof-Load Tested In-House
- ✓ Circular, Square & Rectangular Models

APPLICATIONS

- Preloading Steelwork & Load-Transfer
- Excavation Struts & Temporary Props
- Settlement, Pre-Deflection & Jacking
- Bridge Bearing Replacement & Lifting
- Hydraulic to Permanent Transfusion



SPECIFICATIONS

Model: FJ-30

Maximum Capacity	800 kNs
Maximum Stroke	25 mm
Maximum Pressure	150 Bar
Fluid Requirement	1.90 Litres
Jack Weight	11.50 Kgs
Type / Model	Flat-Jack
Hydraulics	Single-Acting
Function	Water, Oil & Grout Types
Effective Area (approx.)	533 cm2

KEY DIMENSIONS

Collapsed Height (c)	32 mm
Extended Height	57 mm
Outside Diameter (A)	300 mm
Thrust Plate Diameter (B)	255 mm

STANDARD SELECTION

