


RFJ53-58 RECTANGLE FLAT-JACK DATASHEET

TECHNICAL DIMENSIONS

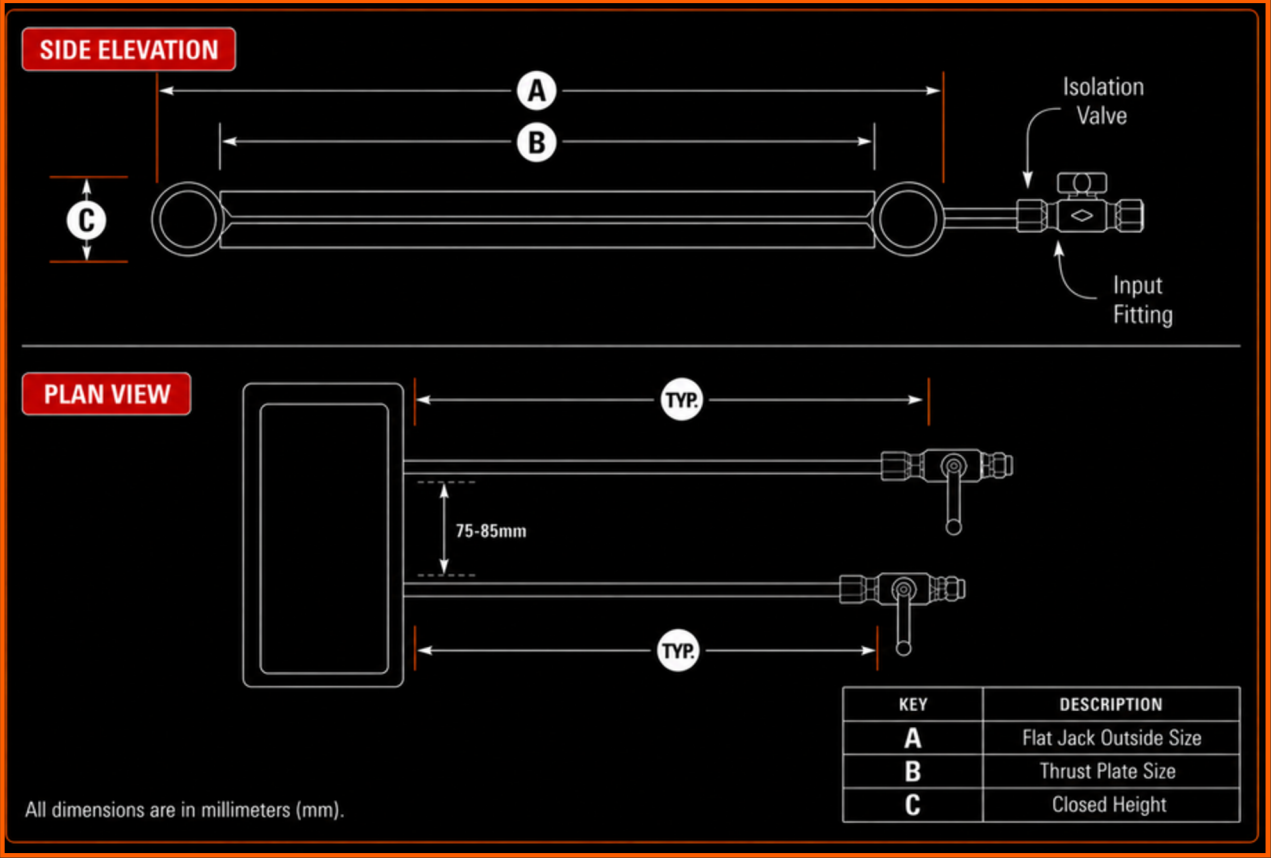

KEY FEATURES

- ✓ Ultra-Low Height Design (28-35mm)
- ✓ High Thrust Forces (40 - 360 Tonnes)
- ✓ Temporary or Permanent Suitable Use
- ✓ Full Proof-Load (UKAS) & ISO Traceable
- ✓ Circular, Square & Rectangular Models

APPLICATIONS

-  Preloading Steelwork & Load-Transfer
-  Excavation Struts & Temporary Props
-  Settlement, Pre-Deflection & Jacking
-  Bridge Bearing Replacement & Lifting
-  Hydraulic to Permanent Transfusion



SPECIFICATIONS

Model: RFJ53-58

Maximum Capacity	3050 kNs
Maximum Stroke	25 mm
Maximum Pressure	140 Bar
Fluid Requirement	2.60 Litres
Jack Weight	26.00 Kgs
Type / Model	Rectangle Flat-Jack
Hydraulics	Single-Acting
Function	Water, Oil & Grout Types
Effective Area (approx.)	2179 cm ²

KEY DIMENSIONS

Collapsed Height (C)	35 mm
Extended Height	60 mm
Outside Size (A)	530 x 580 mm
Thrust Plate Size (B)	485 x 535 mm

STANDARD SELECTION

