


HC20-1050DA DOUBLE-ACTING CYLINDER DATASHEET



TECHNICAL DIMENSIONS

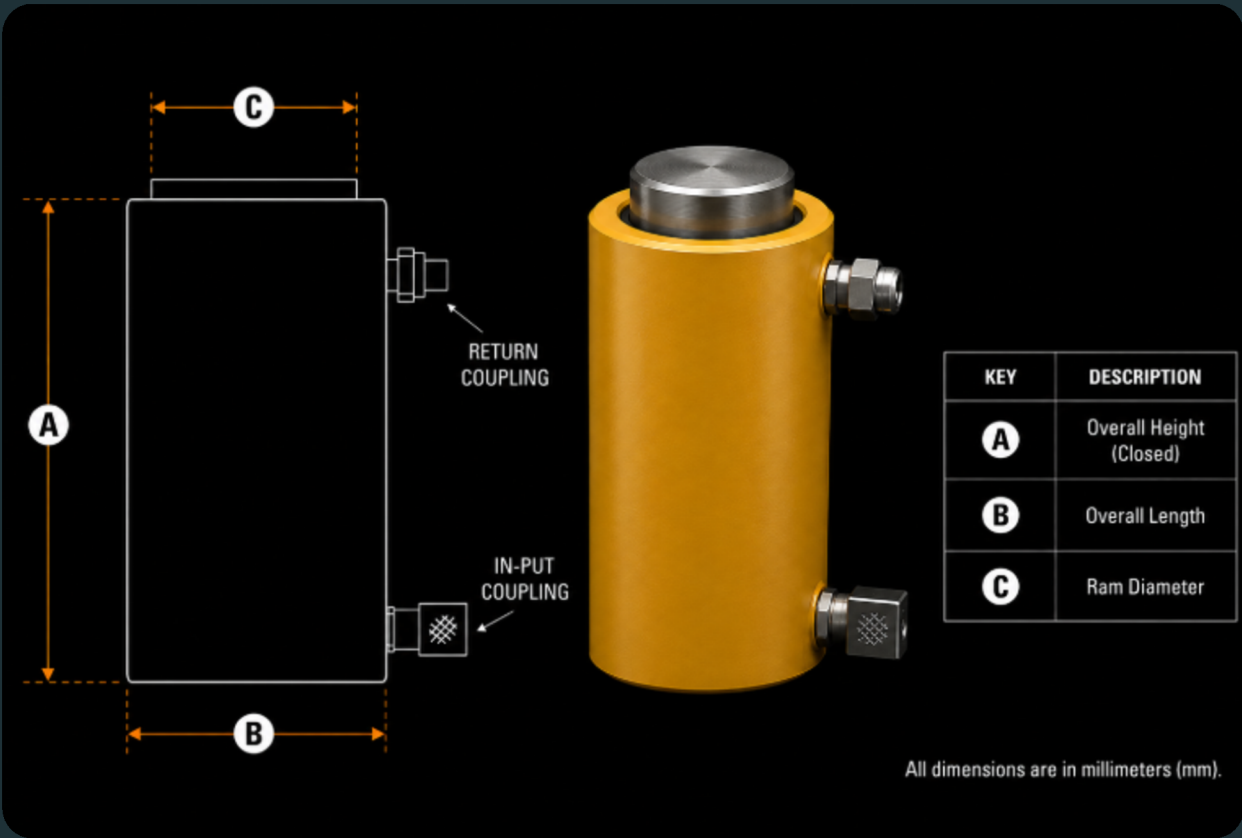

KEY FEATURES

- ✓ Double-Acting Hydraulic Operation
- ✓ Controlled Extension & Retraction
- ✓ High-strength Alloy Steel Construction
- ✓ Precise Load Positioning & Control
- ✓ Fast Cycle Times for Efficiency

APPLICATIONS

- Load testing & proof loading
- Structural lifting & lowering
- Push-pull operations
- Precise positioning & alignment
- Heavy plant & machinery installation

SPECIFICATIONS

Model: DA20-1050DA

Maximum Capacity	200 kN
Maximum Stroke	1050 mm
Maximum Pressure	350 Bar
Fluid Requirement	2.90 Litres
Jack Weight	82 Kgs
Type / Model	Plain Ram
Hydraulics	Double-Acting
Hydraulic Function	Hydraulic Return
Effective Area	56.04 cm ²

KEY DIMENSIONS

Collapsed Height (A)	1290 mm
Outside Diameter (B)	105 mm
Piston Ram / Cap Dia. (C)	38 mm
Extended Height (D)	2340 mm

