


MODEL HC-15 SINGLE-ACTING CYLINDER DATASHEET



TECHNICAL DIMENSIONS

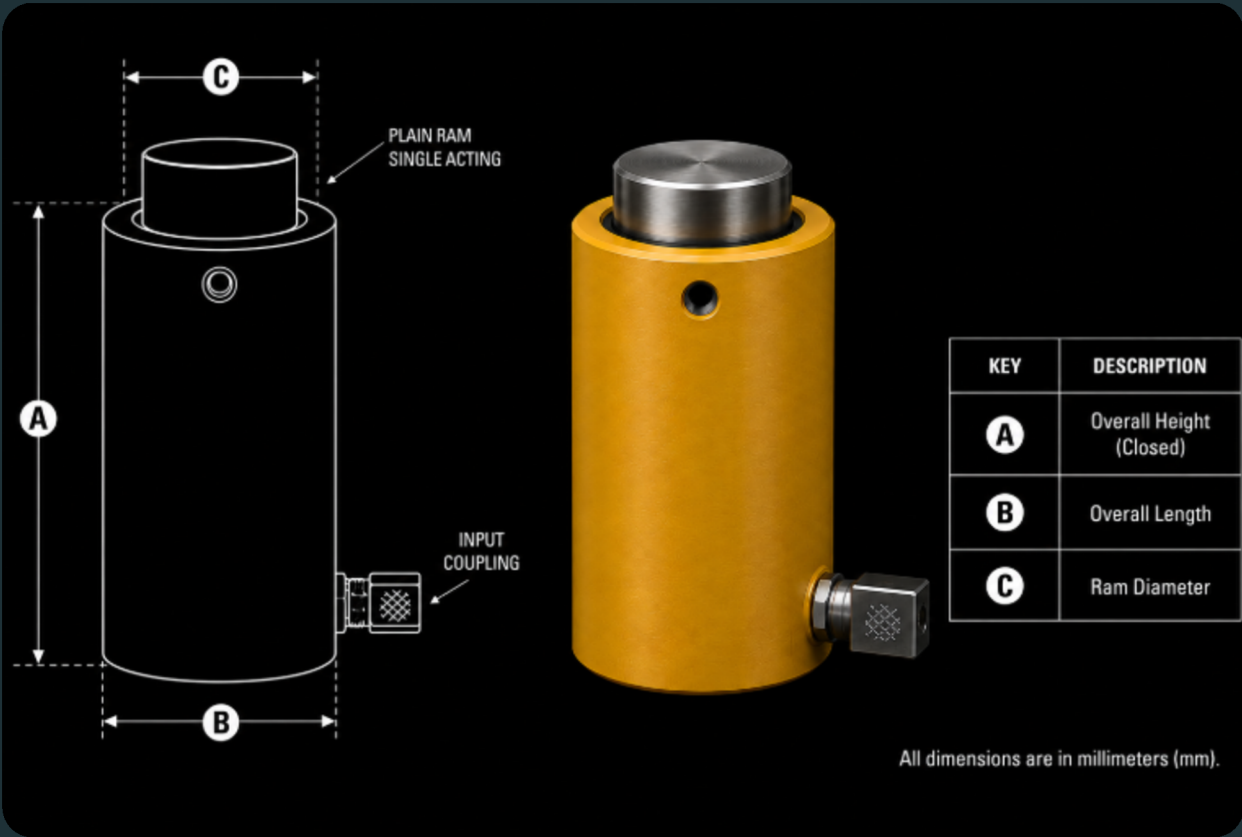

KEY FEATURES
✓ Spring-Return Hydraulic Operation
✓ Controlled Extension & Retraction
✓ High-strength Alloy Steel Construction
✓ Precise Load Positioning & Control
✓ Fast Cycle Times for Efficiency

APPLICATIONS
Load testing & proof loading
Structural lifting & lowering
Push-pull operations
Precise positioning & alignment
Heavy plant & machinery installation

SPECIFICATIONS

Model: **HC15**

Maximum Capacity	150 kN
Maximum Stroke	25 – 400 mm
Maximum Pressure	700 Bar
Fluid Requirement	--- Litres
Jack Weight	3.4 – 12.8 Kgs
Type / Model	Solid Plain Ram
Hydraulics	Single-Acting
Hydraulic Funcation	Spring-Return
Effective Area	21.01 cm2

KEY DIMENSIONS

Collapsed Height (A)	124 – 522 mm
Outside Diameter (B)	69.90 mm
Piston Ram / Cap Dia. (C)	50 mm
Extended Height (D)	Subject to stroke

