


HJ25-150 HYDRA-JACK (LOCKING COLLAR)

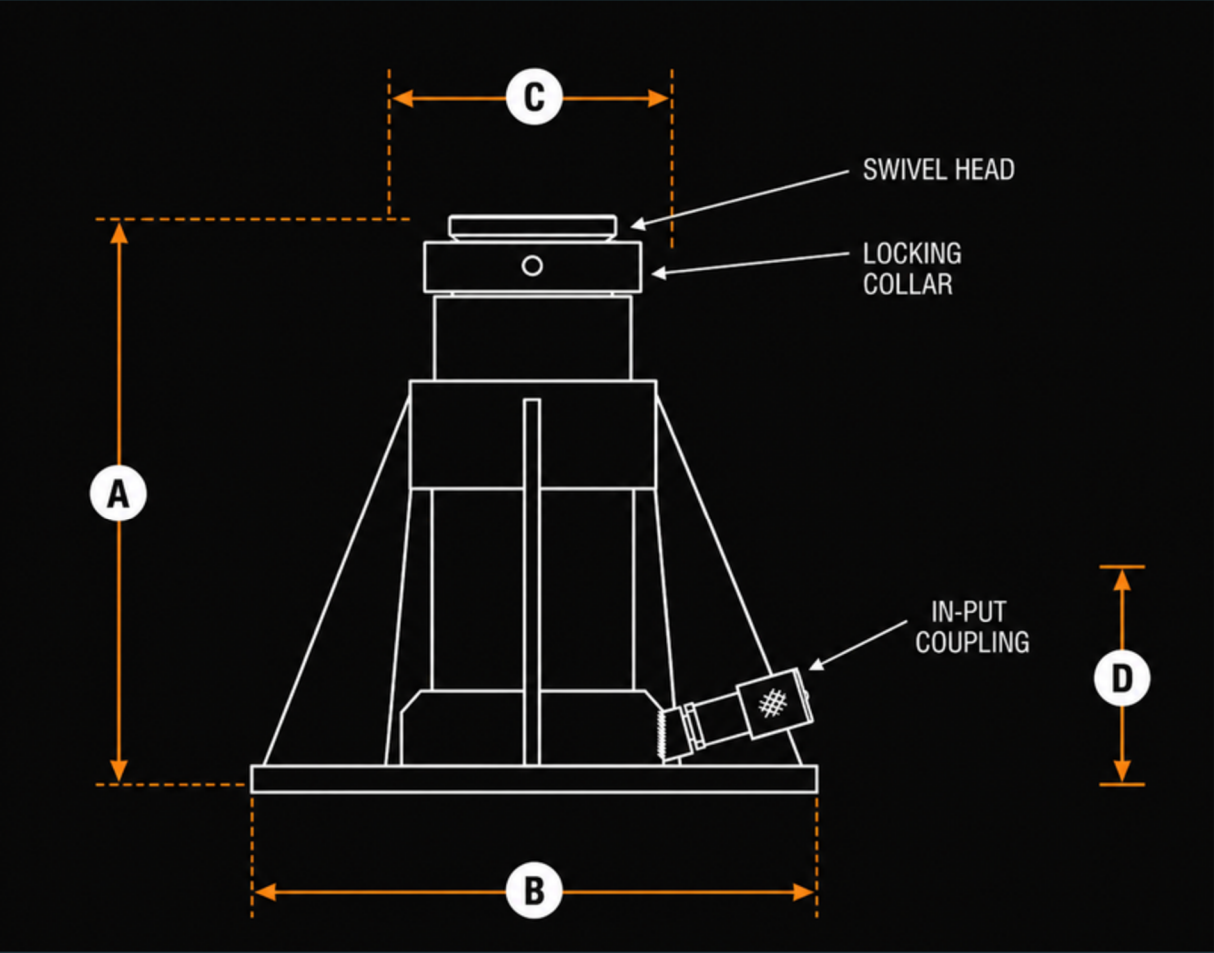

KEY FEATURES	
✓	Locking Collar for Safe Load Holding
✓	Low Height for Restrict Access
✓	High-strength Alloy Steel
✓	Swivel Head for Level Misalignment
✓	Side Load Resistance Capability

APPLICATIONS	
	Bridge bearing replacement
	Heavy structural steel erection
	Offshore platform jack-up
	Building levelling operations
	Railway bridge maintenance

SPECIFICATIONS

Model: HJ25-150

Maximum Capacity	250 kNs
Maximum Stroke	150 mm
Maximum Pressure	700 Bar
Fluid Requirement	0.7 Litres
Jack Weight	23.0 Kgs (Frame Incl.)
Type / Model	Screw Ram (Un-Glanded)
Hydraulics	Single-Acting
Hydraulic Function	Gravity / Load Return
Effective Area	35.71 cm2

KEY DIMENSIONS

Collapsed Height (A)	315 mm
Outside Diameter (B)	80 mm (Base 150 x 150)
Swivel Cap Diameter (C)	90 mm
Extended Height (D)	465 mm

