


HJ300-50 HYDRA-JACK (LOCKING COLLAR)

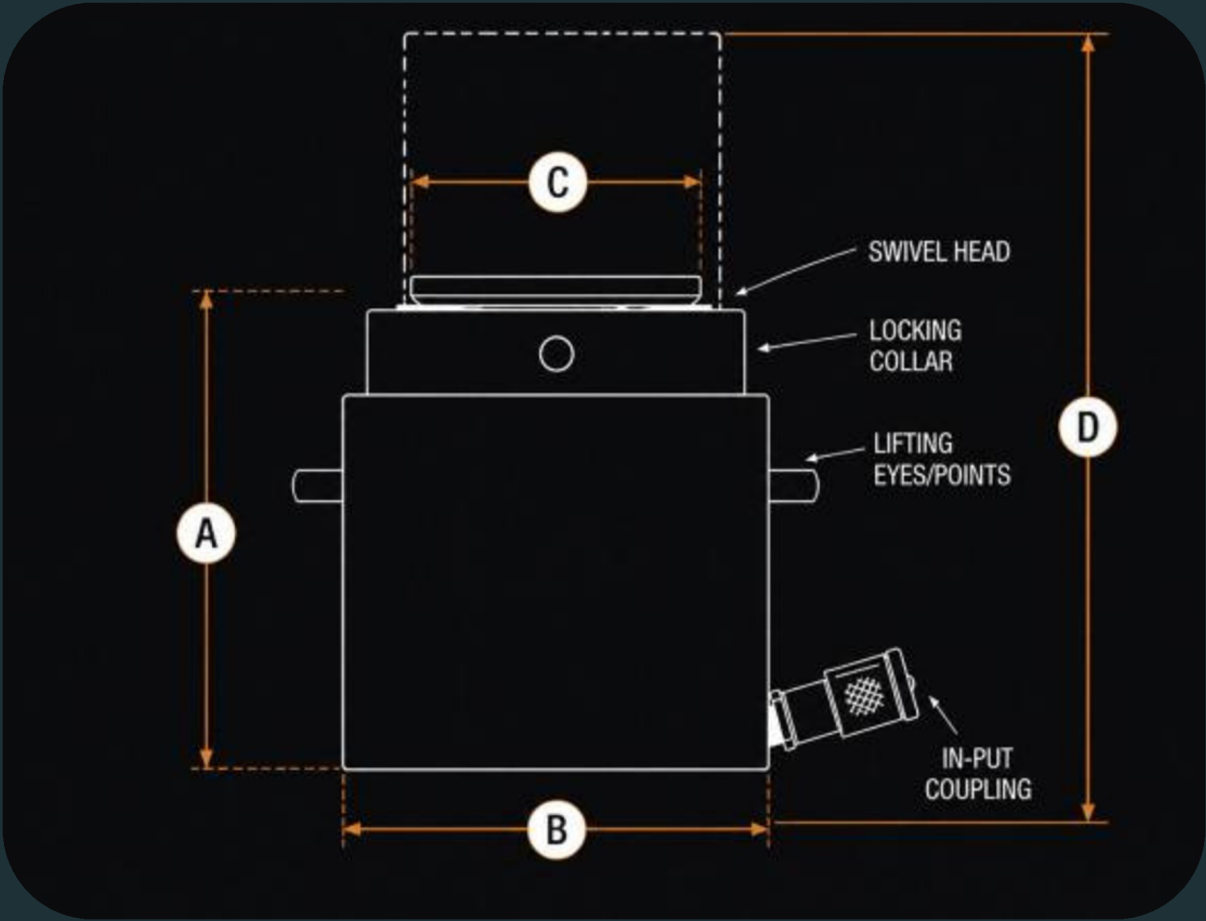

KEY FEATURES

- ✓ Locking Collar for Safe Load Holding
- ✓ Low Height for Restrict Access
- ✓ High-strength Alloy Steel
- ✓ Swivel Head for Level Misalignment
- ✓ Side Load Resistance Capability

APPLICATIONS

- Bridge bearing replacement
- Heavy structural steel erection
- Offshore platform jack-up
- Building levelling operations
- Railway bridge maintenance

SPECIFICATIONS

Model: HJ300-50

Maximum Capacity	3000 kNs
Maximum Stroke	50 mm
Maximum Pressure	700 Bar
Fluid Requirement	2.90 Litres
Jack Weight	92.0 Kgs
Type / Model	Screw Ram (Un-glanded)
Hydraulics	Single-Acting
Hydraulic Function	Gravity / Load Return
Effective Area	428.57 cm ²

KEY DIMENSIONS

Collapsed Height (A)	190 mm
Outside Diameter (B)	290 mm
Swivel Cap Diameter (C)	340 mm
Extended Height (D)	240 mm

