


HJ360-50 HYDRA-JACK (LOCKING COLLAR)

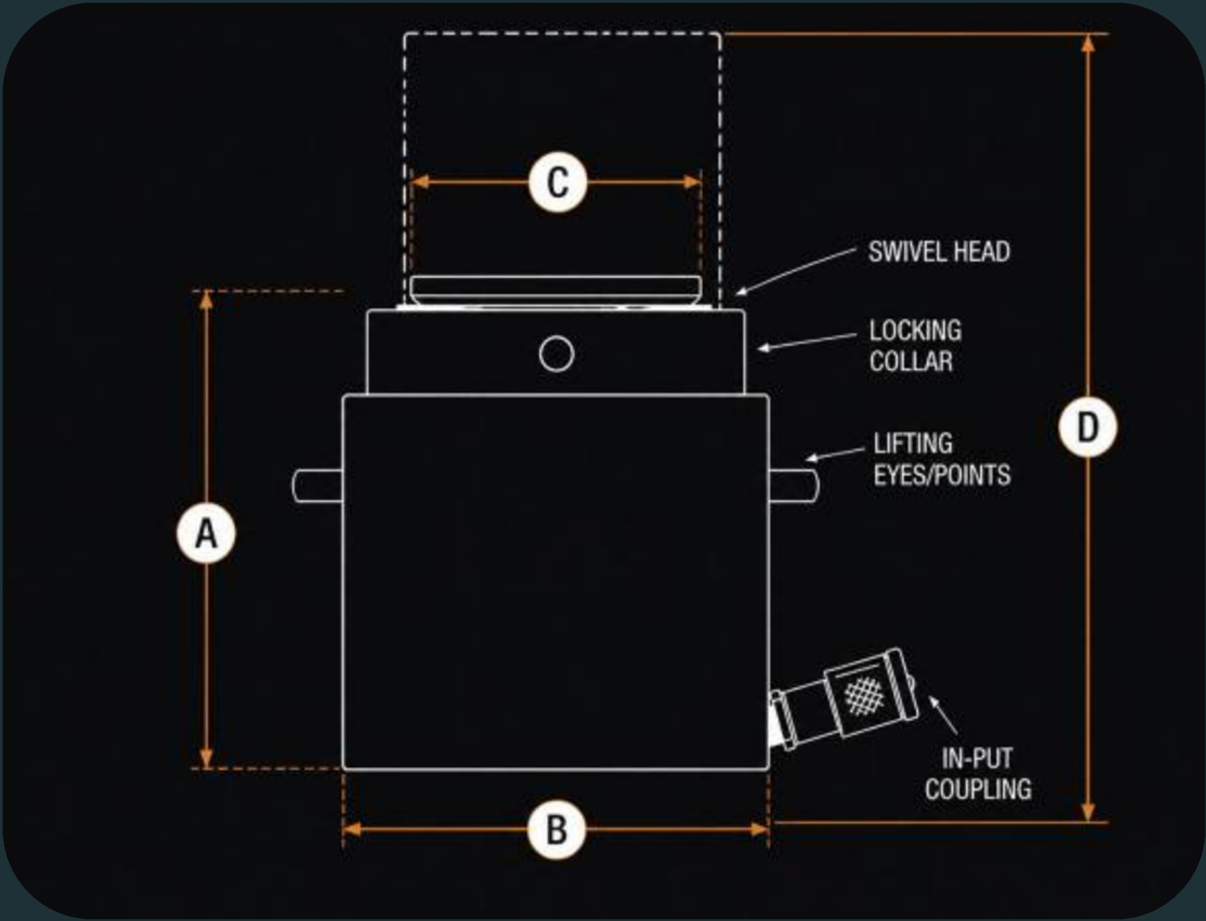

SPECIFICATIONS

Model: HJ360-50

Maximum Capacity	3600 kNs
Maximum Stroke	50 mm
Maximum Pressure	700 Bar
Fluid Requirement	3.40 Litres
Jack Weight	94.0 Kgs
Type / Model	Screw Ram (Un-glanded)
Hydraulics	Single-Acting
Hydraulic Function	Gravity / Load Return
Effective Area	514.29 cm ²

KEY DIMENSIONS

Collapsed Height (A)	175 mm
Outside Diameter (B)	310 mm
Swivel Cap Diameter (C)	260 mm
Extended Height (D)	225 mm

KEY FEATURES

- ✓ Locking Collar for Safe Load Holding
- ✓ Low Height for Restrict Access
- ✓ High-strength Alloy Steel
- ✓ Swivel Head for Level Misalignment
- ✓ Side Load Resistance Capability

APPLICATIONS

- Bridge bearing replacement
- Heavy structural steel erection
- Offshore platform jack-up
- Building levelling operations
- Railway bridge maintenance

