


HJ400-300DA HYDRA-JACK (LOCKING COLLAR)

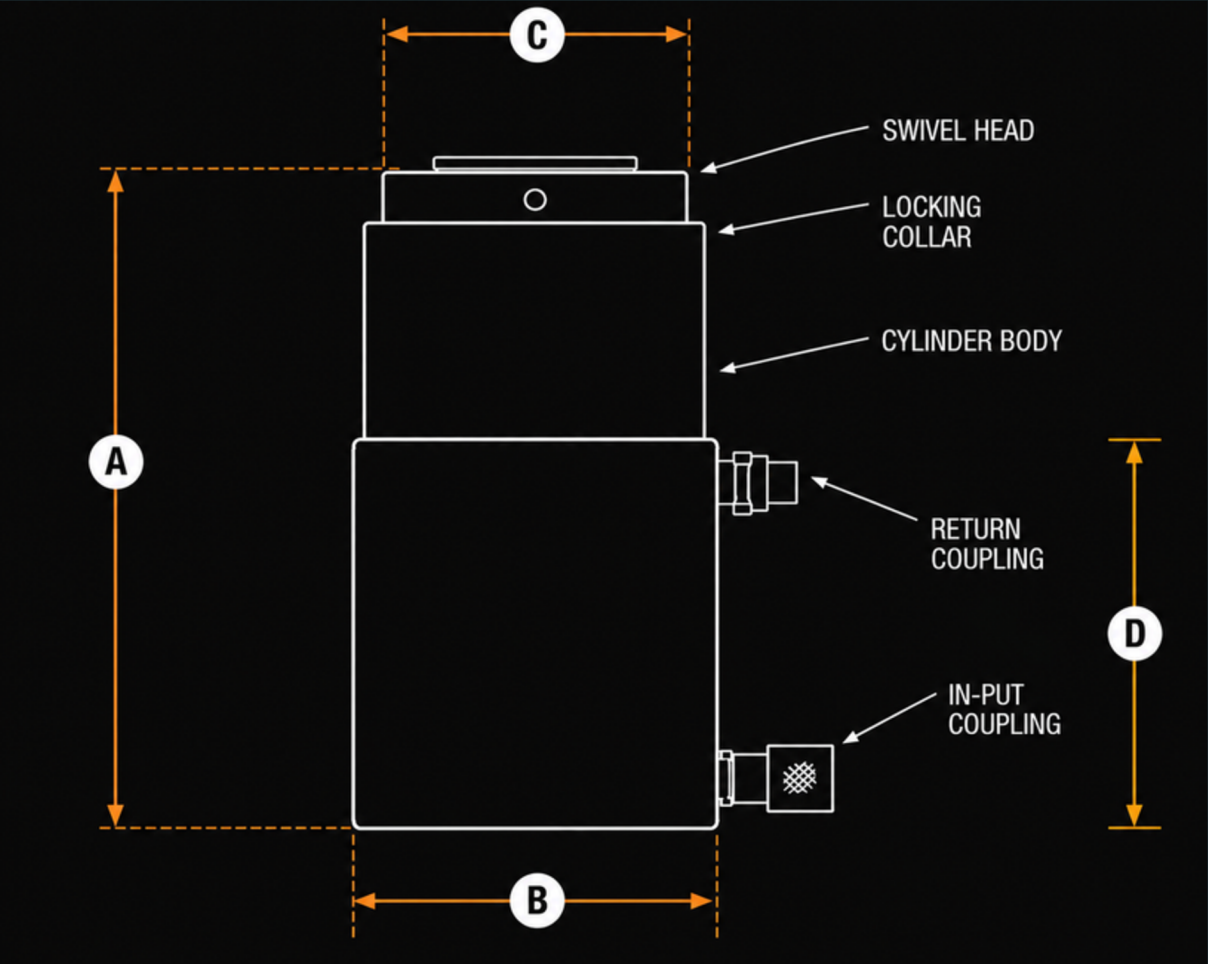

KEY FEATURES

- ✓ Locking Collar for Safe Load Holding
- ✓ Low Height for Restrict Access
- ✓ High-strength Alloy Steel
- ✓ Swivel Head for Level Misalignment
- ✓ Side Load Resistance Capability

APPLICATIONS

- Bridge bearing replacement
- Heavy structural steel erection
- Offshore platform jack-up
- Building levelling operations
- Railway bridge maintenance

SPECIFICATIONS

Model: HJ400-300DA

Maximum Capacity	4000 kNs
Maximum Stroke	300 mm
Maximum Pressure	700 Bar
Fluid Requirement	13.10 Litres
Jack Weight	748.0 Kgs
Type / Model	Screw Ram (Glanded)
Hydraulics	Double-Acting
Hydraulic Funcation	Hydraulic-Return
Effective Area	571.43 cm2

KEY DIMENSIONS

Collapsed Height (A)	920 mm
Outside Diameter (B)	370 mm
Swivel Cap Diameter (C)	240 mm
Extended Height (D)	1220 mm

