


DA25-1050DA DOUBLE-ACTING CYLINDER DATASHEET



TECHNICAL DIMENSIONS

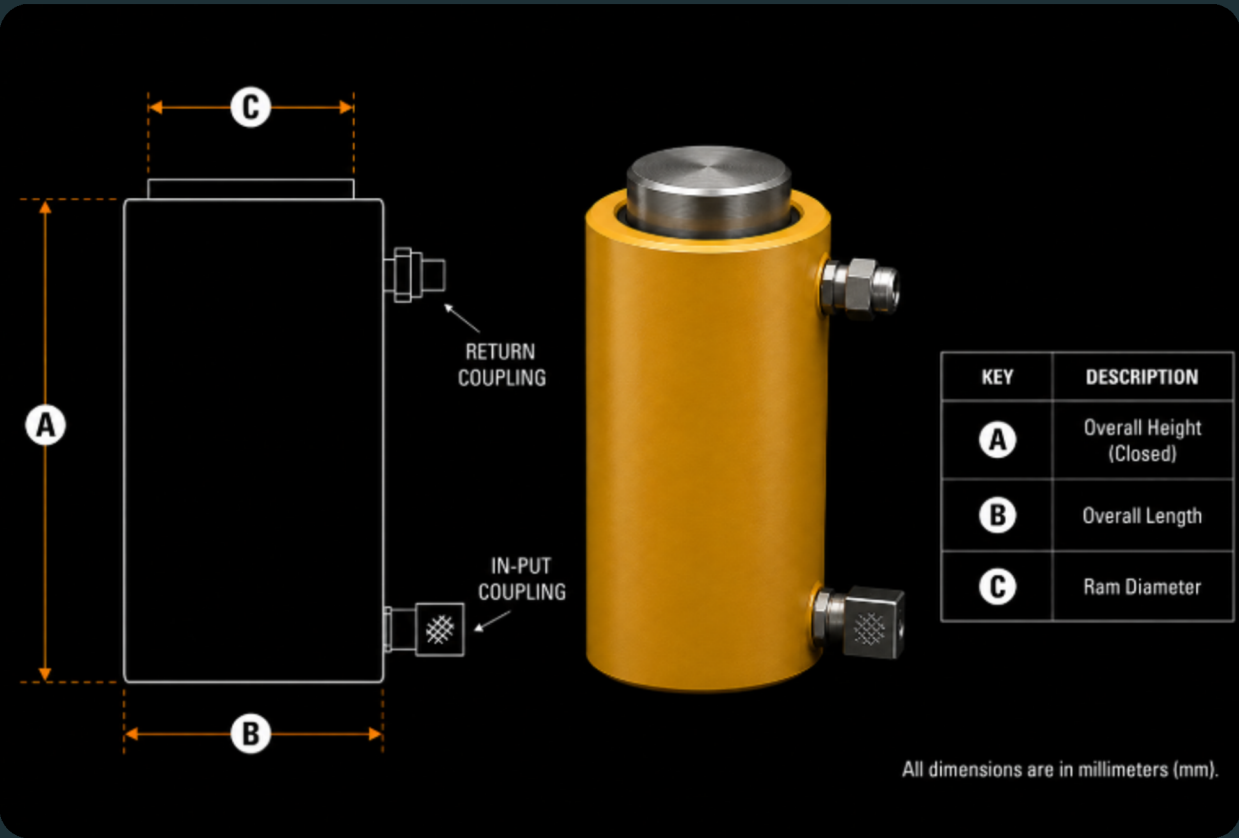

KEY FEATURES

- ✓ Double-Acting Hydraulic Operation
- ✓ Controlled Extension & Retraction
- ✓ High-strength Alloy Steel Construction
- ✓ Precise Load Positioning & Control
- ✓ Fast Cycle Times for Efficiency

APPLICATIONS

- Load testing & proof loading
- Structural lifting & lowering
- Push-pull operations
- Precise positioning & alignment
- Heavy plant & machinery installation

SPECIFICATIONS

Model: DA25-1050DA

Maximum Capacity	250 kN / 100 kN (Pull)
Maximum Stroke	1050 mm
Maximum Pressure	700 Bar
Fluid Requirement	3.62 Litres
Jack Weight	63 Kgs
Type / Model	Plain Ram
Hydraulics	Double-Acting
Hydraulic Funcation	Hydraulic Return
Effective Area	140.10 cm2

KEY DIMENSIONS

Collapsed Height (A)	1250 mm
Outside Diameter (B)	85 mm
Piston Ram / Cap Dia. (C)	35 mm
Extended Height (D)	2300 mm

