


HEAVY DUTY JACKING SYSTEMS

HYDRAULIC ACCESSORIES

HYDRAULIC HOSES


- HIGH WORKING PRESSURE
- CUSTOM-MADE LENGTH(S)
- TESTED TO DIN 20022-1 & SAE 100R9 SPECIFICATIONS
- OPTIMUM FLEXIBILITY
- HOSE LAYERS FOR OPTIMUM STRENGTH PROPERTIES

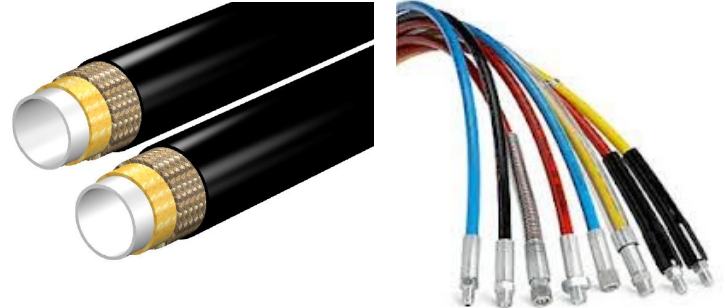

Ref	Length (metres)	I.D (mm / inches)	Maximum Pressure (Bar)	Hose End Fittings	Oil Cap (cc)	Weight (Kg)
HH-01	1	6.35mm / 1/4"	700	3/8" NPTF	115	0.50
HH-02	2	6.35mm / 1/4"	700	3/8" NPTF	230	0.70
HH-04	4	6.35mm / 1/4"	700	3/8" NPTF	460	1.25
HH-08	8	6.35mm / 1/4"	700	3/8" NPTF	920	2.40
HH-16	16	6.35mm / 1/4"	700	3/8" NPTF	1840	4.10
CUSTOM SIZE	-	6.35mm / 1/4"	700	3/8" NPTF	-	0.18

PRESSURE GAUGES AND MANIFOLDS

- SAFE WORKING LOAD OF 700 BAR
- CUSTOM-MADE MANIFOLDS TO SUIT APPLICATION
- SPLIT FLOW CONTROL VALVES

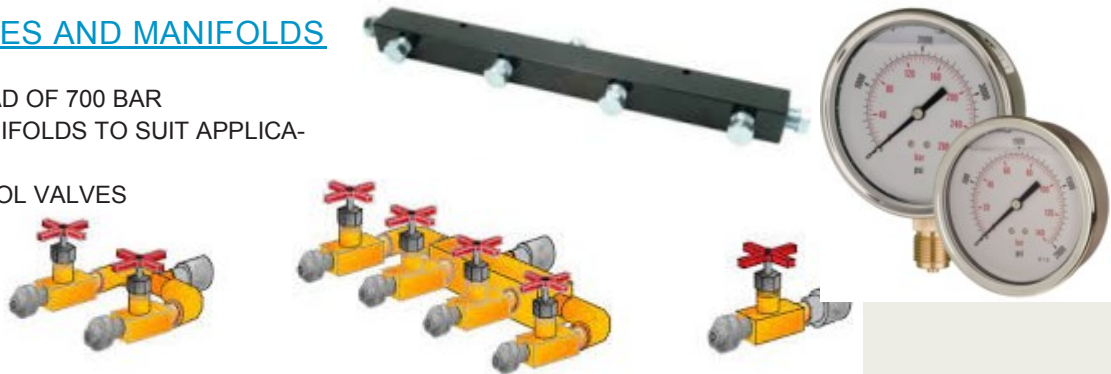

Ref	Description	Face Diameter (mm)	Maximum Pressure (Bar)	Thread / Port Dia (mm)	Number of Ports	Weight (Kg)
PG-700/S	Pressure Gauge	60mm	700	1/4" NPTF	-	0.08
PG-700/L	Pressure Gauge	100mm	700	1/4" NPTF	-	0.12
PG-700/AD	Gauge Adapter	-	700	1/4" NPTF	-	0.05
HM-6	Manifold Block	-	700	3/8" NPTF	6	2.00
HM-V2	Control Manifold Split Flow (2-Way)	Needle Valves	700	3/8" NPTF	2	3.00
HM-V4	Control Manifold Split Flow (4-Way)	Needle Valves	700	3/8" NPTF	4	5.70