


PAD JACKS AND LOW-PROFILE CYLINDERS

FEATURES


- CAPACITY 5 TO 150 TONNES
- MAXIMUM PRESSURE 700 BAR (10,000 PSI)
- LOCKING GLAND TO STOP OVER-STROKING
- STROKE RANGE 11 MM - 16 MM
- CYLINDER PISTON ROD HARD CHROMED
- MANUFACTURED FROM HIGH STRENGTH STEEL
- ROD WIPER PREVENTS INGRESS OF CONTAMINATION
- HIGH FLOW COUPLER
- SINGLE ACTING, SPRING RETURN

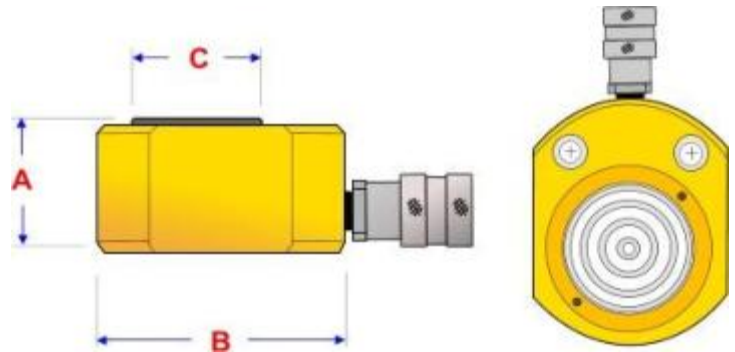

Ref	Capacity (kNs)	Stroke (mm)	Closed Height 'A' (mm)	Outside Dia 'B' (mm)	Piston Dia. 'C' (mm)	Oil Cap (cc)	Weight (Kg)
PR5-16	50	16	41	60	25	11	1.1
PJ10-11	100	11	43	84	38	16	1.7
PJ20-11	200	11	51	102	51	31	2.8
PJ30-13	300	13	59	117	64	54	4.6
PJ50-16	500	16	67	140	70	101	7.2
PJ75-16	750	16	79	165	90	166	12.0
PJ100-16	1000	16	85	177	90	202	14.9
PJ150-16	1500	16	100	215	118	316	25.2

FEATURES

- CAPACITY 10 TO 145 TONNES
- MAXIMUM PRESSURE 700 BAR (10,000 PSI)
- COMPACT DESIGN FOR USE IN CONFINED AREAS
- STROKE RANGE 38 MM - 60 MM
- CYLINDER PISTON ROD HARD CHROMED
- MANUFACTURED FROM HIGH STRENGTH STEEL
- ROD WIPER PREVENTS INGRESS OF CONTAMINATION
- HIGH FLOW COUPLER

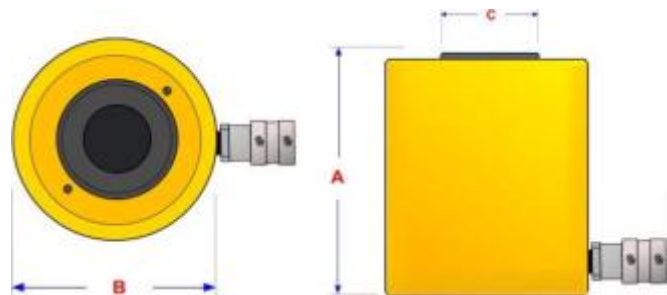

Ref	Capacity (kNs)	Stroke (mm)	Closed Height 'A' (mm)	Outside Dia 'B' (mm)	Piston Dia. 'C' (mm)	Oil Cap (cc)	Weight (Kg)
LP10-38	100	38	88	70	38	58	2.8
LP20-44	200	44	99	92	51	126	5.2
LP30-62	300	62	117	102	63	259	7.0
LP50-60	500	60	122	125	70	381	10.5
LP100-57	1000	57	141	165	90	722	21.5
LP145-60	1450	60	155	200	100	1195	45.0