


Solar Shading

Lift-In-Out Installation


Detent Ring-Pin To Lock Down The Panels

Profile: DT-34 Top Track EN-AW 6063 T6

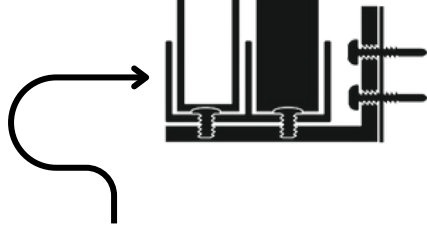


Profile: BT-32 Double Track EN-AW 6063 T6

Alternating Overlapped KoolSHade Solar Screens Replicate the Existing Glazing

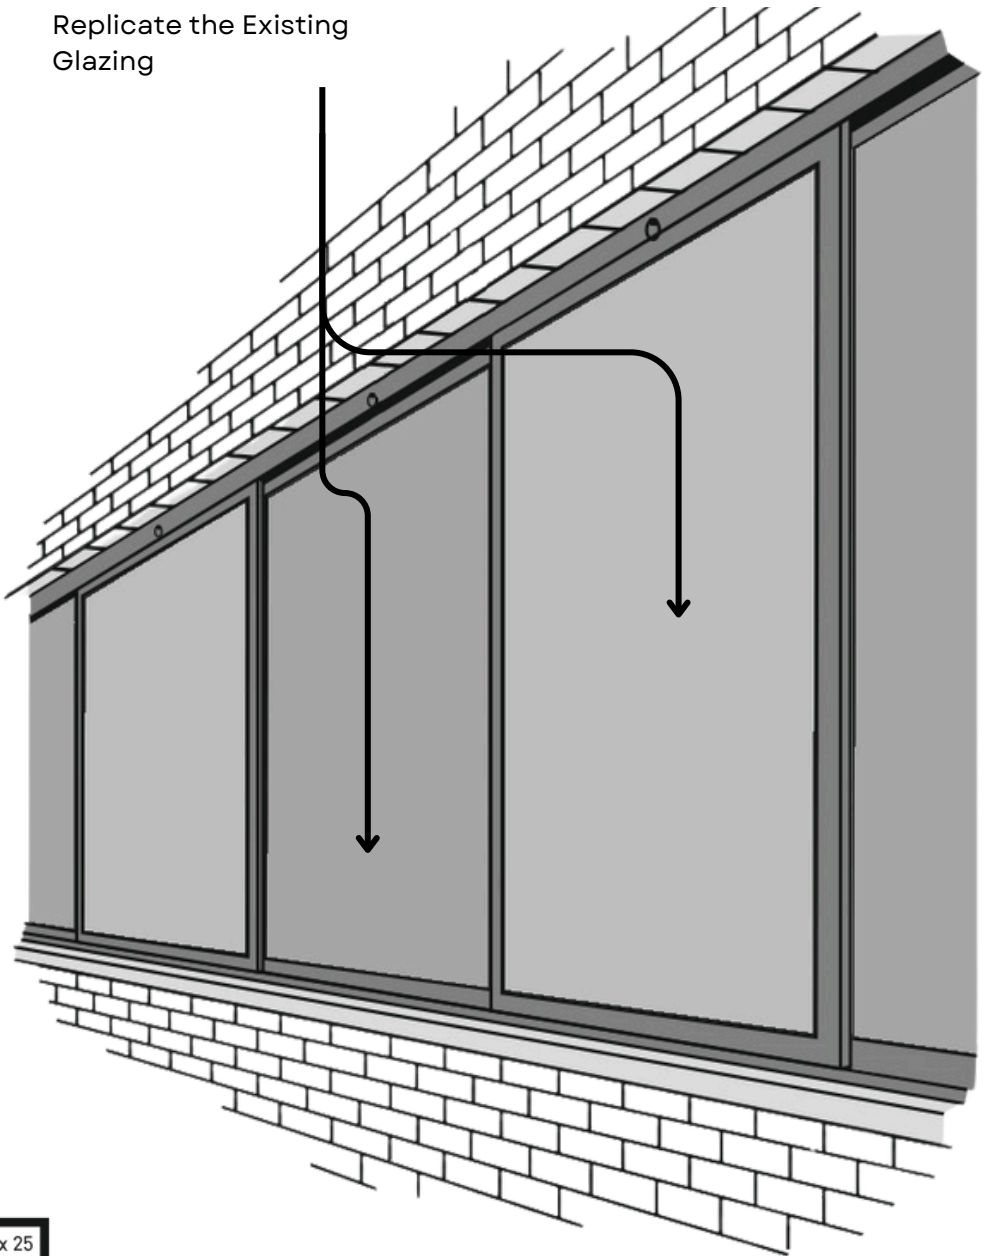

TRACK MOUNTING BRACKETS



FASTENING OPTION



ALL EXTRUSIONS ARE POLYESTER POWDER COATED IN ANY RAL COLOUR COMMERCIALY AVAILABLE POWDER COAT TO MEET OR EXCEED ISO 2409 AND ISO 9227. ALL DRAWINGS HERE ARE FOR ILLUSTRATIVE PURPOSES ONLY AND NOT TO SCALE.

Visit us:
www.smartlouvre.com

Talk to us:
 +44 (0) 239 245 6333

Request a sample:
info@smartlouvre.com