
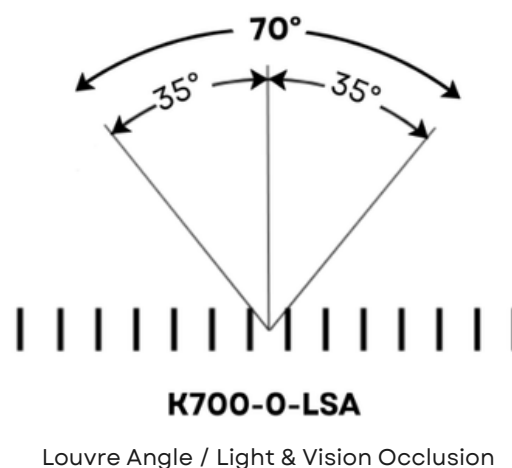


Performance & Physical Characteristics - Coated Fabric (MN204E - PPC)

MicroLouvre® inserts are an advanced light control solution that enhances the efficiency, precision, and effectiveness of lighting systems.

Weft (each louvre)	Width	1.70mm
	Thickness	0.38mm
	Louvre Spacing	1.50mm
	Louvre Count	17 nominal
	Louvre Angle	0° (degrees) from normal plane when vertical
Warp (each wire)	Diameter	0.310mm max
	Spacing (nominal)	12.7mm
	Fabric thickness O/A	2.26mm
Weight (nominal)	per Square Metre	1.35 kg (2.43 lb)

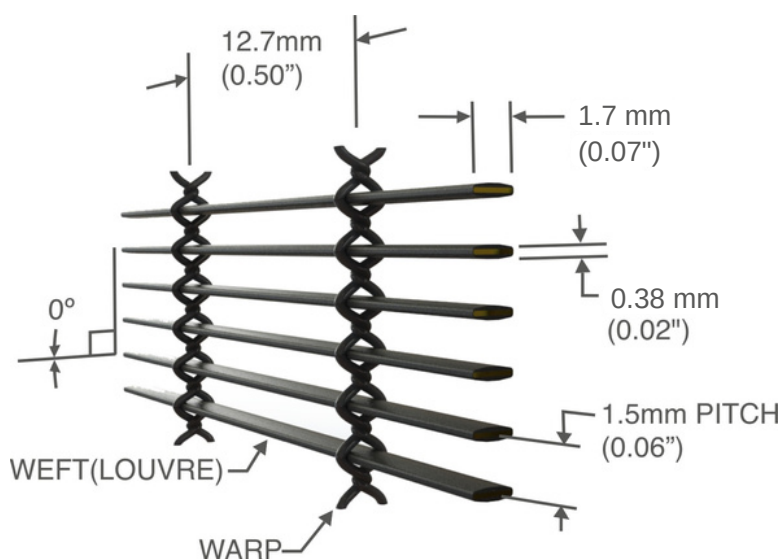

Open Area: 80%

Colour Rendering Index (CRI): 100%

Eclipse Angle: 0° to 35° & 130° to 180° from horizontal

Louvre Angle: 90° from horizontal when horizontally mounted

Fire/Heat Attenuation: 49.4% Compliant up to BAL-40(40kW/m2 incident irradiance)

Lumen Output Differential: Black Finish 25% nom. White Finish 35% nom.

All angles, weights and dims are nominal

Direct Light

Minimise Glare

Stop Light Spill

Stop Light Trespass

Lighting Design

Control Light Distribution

Visit us:
www.microlouvre.com

Talk to us:
+44 (0) 239 245 6333

Request a sample:
info@microlouvre.com

Doc ID: TDS 5 May 2025