

ExcelGenerators

UK MANUFACTURED GENERATORS



EXCEL MODEL:

XL745P – XL800P

PERKINS 4006 SERIES TECHNICAL DATA SHEET

Cost Effective Power:

- Economic Power- 4 valve heads
- Reliable Power-piston jet cooling
- Clean efficient power-low gaseous emissions
- Global distributor network



Excel	Perkins	380-415	50hz	480v	60hz
Generating Set Model	Engine Model	KVA	KW	KVA	KW
XL745P (PRIME)	4006-23TAG2A	745	596	750	600
XL745P (STANDBY)	4006-23TAG2A	815	652	844	675
XL800P (PRIME)	4006-23TAG3A	800	640	844	675
XL800P (STANDBY)	4006-23TAG3A	900	720	938	750

RATING DEFINITIONS

Prime Power


These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and these models can supply 10% overload power for 1 hour in 12 hours.

Standby Power

These rating are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.

DIMENSIONS AND WEIGHTS

Genset Models:	Net kg	Length mm	Width mm	Height mm
PCS745P	6400KG	3990	1711	2300
PCS800P	6400KG	3990	1711	2300

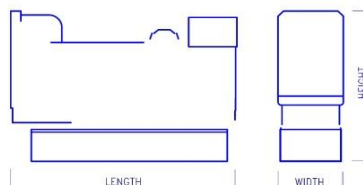

Excel Power Ltd
Tel: ++(0) 23 8129 0160 Fax: ++ (0)23 8129 0260
e: info@excelpowerltd.co.uk w: www.excelpowerltd.co.uk

PERKINS ENGINE TECHNICAL DATA

Generating Set Model:	XL745P	XL800P	
Engine Manufacturer:	PERKINS	PERKINS	
Model:	4006-23TAG2A	4006-23TAG3A	
Number of Cylinder:	6 In line	6 In line	
Displacement:	22.921	22.921	
Cycle	4 stroke	4 stroke	
Cooling System	Water cooled	Water cooled	
Combustion System	Direct Inj.	Direct Inj.	
Bore/Stroke: (mm)	160X190	160X190	
Aspiration:	Turbo charged A2A	Turbo charged A2A	
Direction of rotation	Anti-clockwise	Anti-clockwise	
Lub. Oil Capacity ltrs:	113.4	113.4	
Coolant capacity ltrs:	105ltrs	105ltrs	
Electrical equipment	24vDC	24vDC	
Compression Ratio:	13.6:1	13.6:1	
50 hz			
Engine Speed:	1500rpm	1500rpm	
Maximum Continuous Power at Flywheel: kw	620	679	
Maximum Standby Power at Flywheel: kw	685	760	
Fuel Cons: L/hr			
110%	173	194	
100%	157	172	
75%	121	130	
50%	83	90	
60hz			
Engine Speed:	1800rpm	1800rpm	
Maximum Continuous Power at Flywheel: kw	640	715	
Maximum Standby Power at Flywheel: kw	715	795	
Fuel Cons: L/hr			
110%	199	224	
100%	177	200	
75%	129	144	
50%	90	96	

NOTE: All engine performance data based on our maximum continuous rating at the standard reference conditions specified. Fuel consumption data at full load with a diesel fuel with a specific gravity of 0.85 conforming to BS2869:1988, Class A2

In line with our policy of continuous product development, we reserve the right to change specifications without notice.

ALTERNATOR MODELS

Mecc Alte (UK)	ECO40-VL	ECO43-1SN	
Newage Stamford	HCI634G	HCI634G	
Leroy somer	LSA49.1M6	LSA49.1M75	

STANDARD OPTION:

12/24volt axial starter motor
12/24v Heavy duty batteries
Engine driven charging alternator
Engine starting motor
Set mounted heavy duty tropical radiator and pusher fan
Fuel oil filter
Lub oil filter
Air intake filter
Energised to run solenoid
Low oil pressure switch
High engine temperature switch
Industrial silencer with flexible section
Mechanical/electrical governor or ECM(check with sales)
8hr base fuel tank upto 800kva
Open Skid base above 800kva
Captive AVMs
One set operation manuals
One set engine and alternator maintenance books
One set electrical schematic drawings
TESTING All units are fully tested in our works prior to despatch and each unit is issued with a Test Certificate.
WARRANTY All Excel equipment carries a full 12 month warranty in accordance with our conditions of sale. 24monthys warranties are available FOC for standby units running at limited hours (please checkwith sales for full details.

AVAILABLE OPTIONS:

55DBA-85DBA weatherproof acoustic canopies and containers
Residential silencers
Critical silencers
Full EEC trailers
Non EEC trailers
Free Standing fuel tanks
Bunded fuel tanks
Automatic fuel make-up system
Fuel level warnings
Unlimited other options are available.

ALTERNATOR:

We use Cummins Generator technology (Newage Stamford), Leroy Somer of France and also MeccAlte of the UK(upto 350kva) and MeccAlte of Italy (360-3000kva)
Brushless revolving field
4 pole
Class H Temperature rise 125/40
Class H Insulation
Automatic voltage regulator
Single bearing
0.5% Voltage regulation (Leroy)
1.0% Voltage regulation 200kva and above (MeccAlte)
1.5% Voltage regulation 0-180kva and above (MeccAlte)
0.5% Frequency regulation
TIF 50/NEMA MGI-22-43
THF >3%
RFI to BS800
50HZ Voltage range- 380/220 – 415/240v
60HZ Voltage range- 220/127 – 480/277v

SET MOUNTED DIGITAL CONTROL SYSTEM:

Deepsea model 6110 microprocessor engine control module provides metering and alarm facilities via the LCD display as follows:
Emergency stop pushbutton
Generator volts line/line
Generator volts line/neutral
Generator amps 3 phase
Generator frequency Hz
Engine speed
Engine oil pressure
Engine coolant temperature
Engine battery/volts
Engine hours run

PROTECTIONS:

Generator over-volts – shutdown
Generator under-volts – shutdown
Over speed – shutdown
Under speed – shutdown
Over frequency Hz – shutdown
Under frequency Hz – shutdown
High current – alarm
Battery charge fail – alarm
Emergency stop
Low oil pressure – shutdown
High engine temperature – shutdown
Fail to start – alarm
High battery volts – alarm
Low battery volts – alarm
Fail to come to rest – alarm
Loss of speed sensing signal – alarm
LED indication indicates – alarm
(amber) or shutdown (red flashing)
USB PROGRAMME PORT – standard printer cable connection

TIMERS:

Start delay
Stop delay
Crank/crank rest timer
Engagement attempt and manual crank limit
Safety on delay timer
Warm up timer
Cooling timer
Energise to stop timer

CONTROL SYSTEM UPGRADES:

7210 auto-start unit gives the following extra's:-
Generator KVA
Generator KW
Generator COS

5510 auto-synchronising unit gives you the following upgrades:-
Generator kVA L1, L2, L3, Total
Generator kW L1, L2, L3, Total
Generator Pf L1, L2, L3, Average
Generator kVAh L1, L2, L3, Total
Generator kWh
Generator kVAh
Generator kVAh
Generator Phase Sequence
Full automatic synchronising
Automatic load sharing
Automatic load level demand (switches units on and off line depending on load levels)

Automatic transfer panel (ATS) 25 – 1000A Contactors

IP55 wall or freestanding sheet steel cubicle with hinged front access door and base entry gland plate. Finished in grey epoxy polyester powder-coat.

AC1 Rating at 40oC

Fitted with;

- 1 x Pair of 4 pole mechanically and electrically interlocked contactors.
- x Set of load links and terminals upto 125A.
- 1 x Set of copper bar load links above 125A.
- 1 x 3 ph + N mains detector.
- 1 x Mains available indicator.
- 1 x Mains on load indicator.
- 1 x Generator available indicator.
- 1 x Generator on load indicator.
- 1 x Set of control and monitoring MCB's.
- 1 x Earth stud.
- 1 x Set of interconnecting terminals.
- 1 x Hazard warning label
- 1 x Rating label.

Dimensions 4 pole ;

25A – 125A	H600mm x W400mm x D200mm
200A – 450A	H800mm x W600mm x D300mm
550A –1000A	H1200mm x W800mm x D400mm

Automatic transfer panel (ATS) 800 – 6300A Circuit Breaker

Floor-standing cubicle with hinged front access door and removable side and rear covers for ease of installation. Top and base entry aluminium gland plate. Control compartment IP2X and segregated from load switching. Secondary screening over switchgear. Finished in grey polyester powder-coat RAL7035.

Fitted with;

- 1 x Pair of motorised mechanically and electrically interlocked fixed pattern circuit breakers (Non Auto).
 - 800 - 1600A MCCB (MCS)
 - 800 – 6300A ACB
- 1 x Set of load connection terminals.
 - Generator / Mains / Load.
 - 1 x Mains available indicator.
 - 1 x Mains on load indicator.
 - 1 x Generator available indicator.
- 1 x Generator on load indicator.
- 1 x Set of control and monitoring MCB's.
- 1 x Earth bar.
- 1 x Set of interconnecting terminals.
- 1 x Hazard warning labels
- 1 x Rating label.

Dimensions;

MCCB;

800 - 1600A H1800mm x W600mm x D800mm

ACB;

800A – 1600A H1800mm x W 600mm x D800mm

2000A H2000mm x W 800mm x D800mm

2500A – 3200A H2000mm x W1000mm x D800mm

4000A H2000mm x W2000mm x D800mm

5000A – 6300A H2000mm x W2400mm x D800mm